


FIAMM

Industrial Batteries

ENDURLITE

XL 2V cells

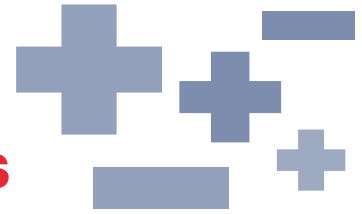

Applications and Key Benefits

- + 2V cells with grid plates and electrolyte in gel
Ideal for:
 - Use in areas with unstable power supply
 - Operation at elevated temperature
 - Electric utility
 - Railway equipment
 - UPS application
 - Renewable energies (Solar / Wind)
 - Telecom wireless and wireline
 - Industry and process controls
 - Emergency power supply systems
 - IT network operations and data centers
 - Switchgear
- + Excellent for deep DOD cycling and deep discharge recovery (DIN 43539T5)
- + Suitable for short (30 min) to very long (20 h) discharge
- + FV0 flame retardant plastics
- + Minimal gassing and maintenance free without topping - up
- + Recyclable

Applicable Standards

- DIN 43539T5 – deep DOD cycling and deep discharge recovery
- IEC 60896 Part 21 - VRLA methods of testing
- IEC 60896 Part 22 - VRLA requirements
- BS 6290 Part 4 – VRLA classification
- Eurobat “Long Life” – 12 years and longer
- UL Recognized

FIAMM Manufacturing

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- OHSAS 18001 – Workplace Safety and Health

Technical Features

- Thick pasted plates with high quality lead-tin-calcium alloy for low corrosion and high rate performance
- Electrolyte immobilized in gel structure, filling completely the space between the plates top to bottom
- Separators with extremely high porosity and low internal resistance
- ABS IEC 707 FV0 flame retardant plastics
- Container and lid designed for high mechanical strength
- Female M8/M10 terminals guarantee high conductivity, minimum installation time and maximum torque retention
- Flame arrestors expel excess gas and prevent sparks or flames from entering the battery
- Safety valves operate at low internal pressure



ENDURLITE


XL 2V cells

FIAMM XL range


BATTERY TYPE	NOMINAL VOLTAGE (V)	CAPACITY (Ah) at 20°C	SHORT CIRCUIT CURRENT (A)	INTERNAL RESISTANCE (mOhm)	DIMENSIONS (mm)			WEIGHT (kg)	TERMINAL TYPE
		10 hrs to 1.80 VPC	IEC 60896-21	IEC 60896-21	Width	Length	Height		
2XL150	2	150	2780	0.74	107	171	362	11.7	Female M8
2XL200	2	200	3120	0.66	107	171	362	14.8	Female M8
2XL300	2	300	3320	0.62	151	171	362	20.6	Female M8
2XL400	2	400	5140	0.40	175	211	362	28.5	Female M8
2XL500	2	500	6050	0.34	174	240	362	34.3	Female M8
2XL600	2	600	7620	0.27	176	302	363	42	Female M8
2XL700	2	700	8296	0.25	175	411	362	51.5	Female M10
2XL800	2	800	10280	0.20	175	411	362	56.8	Female M10
2XL1000	2	1000	12090	0.17	175	478	362	69.3	Female M10

Note: dimensions may have a natural tolerance of ± 2 mm


Dimensions



2XL150
2XL200
2XL300



2XL400
2XL500
2XL600

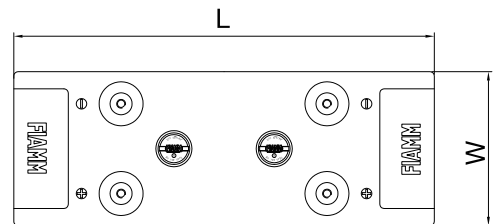

2XL700
2XL800
2XL1000

Electrical Characteristics

- ✦ FLOAT VOLTAGE CHARGE AT 20-25 °C: Standby use 2.25-2.27 V/cell
- ✦ BOOST CHARGE: 2.35 V/cell
- ✦ MAXIMUM CHARGE CURRENT: 0.25C_{10A} (i.e.: for a 100Ah bloc maximum charge current is 25 Amps)
- ✦ FLOAT VOLTAGE TEMPERATURE COMPENSATION : - 2.5mV/°C/cell
- ✦ SELF-DISCHARGE AT 20 °C : < 2% / month
- ✦ WARNING: in order for the warranty to be valid in all critical, frequent discharge and hybrid applications, please coordinate with Fiamm Group to clarify required operating and charging settings

FIAMM S.p.A.
Industrial Batteries
www.fiamm.com
email: info.standby.asia@fiamm.com



Industrial Batteries